


MCWH

MCWHU "HULK" SERIES DOUBLE SECURITY CRANE SCALES

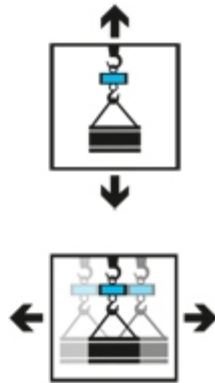

High capacity crane scales for industrial use, reliable and easy to use, suitable both for business warehouses as well as for more adverse environments.

Thanks to the double security system, they allow to lift and move the suspended load, recommended for permanent installation in the lifting system.

Available for internal factory use or CE-M APPROVED. TAKES UP LITTLE SPACE, allowing the best use of the lifting devices (overhead bridge, crane, etc.). Configuration for upper connection ring and lower hook. The models with up to 15000 kg capacity are fitted with test certificate obtained with standard weights, for higher capacities the certificate is available on request.

The best solution
for advanced industrial
applications

MAIN FEATURES

- Double security system, for permanent installation in the lifting system; recommended for lifting and moving the suspended load.
- In compliance with the directives 2006/42 CE, UNI EN 13155/2009, UNI EN 13889, 2014/30/EU.
- 40 mm RED LED display.
- Waterproof keyboard with 5 keys which are ZERO, AUTOMATIC TARE, MODE, PRINT, and ON/OFF.
- Protective screen in plexiglas for display and keyboard.
- Precision: +/- 0.05% F.S.
- Built extremely sturdy in oven-fire painted sheet steel, with I P 6 7 protection degree against dust and sprays.
- Weigh: 86 kg, with packaging 103 kg.
- Radiofrequency 6-key remote control, 433MHz, for use up to 50 m of distance. Configurable as automatic tare only or as a remote keypad.
- Fitted with extractable rechargeable battery pack, with 60-hour operating time, designed to be combined with MCWHBK option for 24/7 continuous use of the crane scale. Standard fitted with battery charger.
- Digital set-up and calibration programmable directly from keyboard using a sample weight.
- Operating temperature: -10 /+80°C, with optional heat shield (-10/+40°C for the CE-M approved model).
- Programmable digital filter and auto power saving function.
- Equipped with 230 Vac 50 Hz battery charger, for charging the battery from the crane scale.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Radio frequency transmission to remote indicator up to 70 m indoors.
- WI-FI interface.
- Heat shield for protection from infrared rays and high temperatures.
- Remote weight indicator (see DFW., 3590., TRS., DGT.. series weight indicators) with printer or other accessories connected through radio frequency.
- Separate 230 Vac 50 Hz recharging station for 24/7 continuous use, made up of additional battery pack and adapter for the external recharge of the battery.
- Date and Time.
- ACCREDIA calibration certificate according to OIML/ASTM standards.

SELECTABLE FUNCTIONS

- High Resolution Weighing x 10.
- Net/Gross or lb/kg conversion.
- Accumulation.
- +/- Checkweighing.
- Percentage weighing.
- Counting.
- HOLD (lock of the displayed weight).
- PEAK (maximum value read).
- Peer-to-peer.

VIDEO

DETAIL 1




MCWHU: view of the back.

DETAIL 2



Fitted with extractable rechargeable battery pack.

DETAIL 3

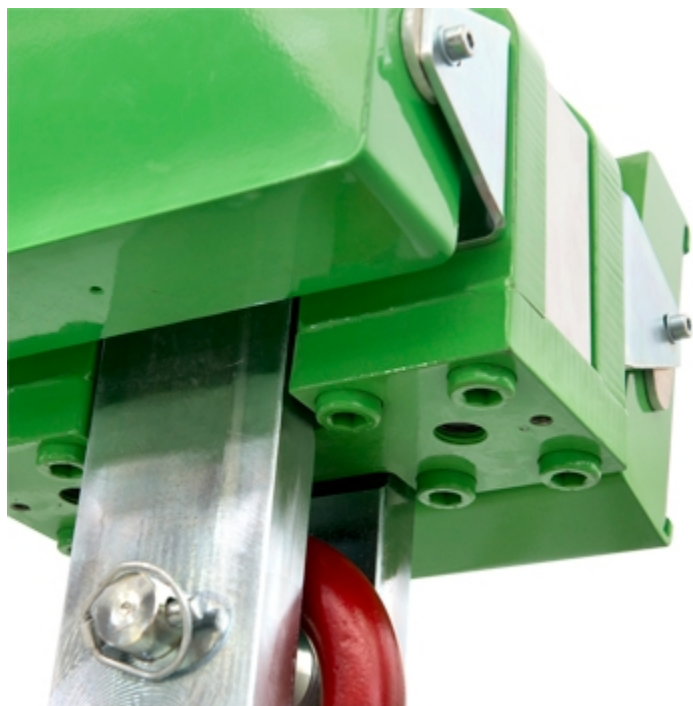

Reinforced base.

DETAIL 4



Protective screen in plexiglas for display and keyboard.

VERSIONS

Versioni disponibili

Codice	Max (kg)	d (kg)	M (kg)
MCWHU10-2	10000	2	--
MCWHU15-2	15000	2	--
MCWHU25-2	25000	5	--
MCWHU10M-2 M	10000	--	10
MCWHU15M-2 M	15000	--	10



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI AR GEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI AR GEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI AR GEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI AR GEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com




HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com

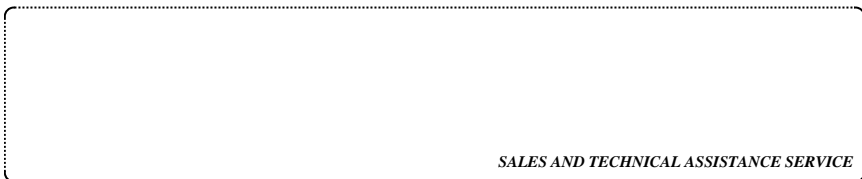

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.